



## SAMPLE SCREENER DEVICE




**T** The Sample Screener Device is a stand-alone unit that is used for sample screening in assay applications.

an opening in the front for a drawer and an opening in the back for dust to exhaust to the bag house.

The crusher screener incorporates a stainless-steel base that is closed on three sides. It has

A Sample Screener Device includes a stainless-steel funnel attached with four springs with a removable tray made from 0.22" stainless steel screen.

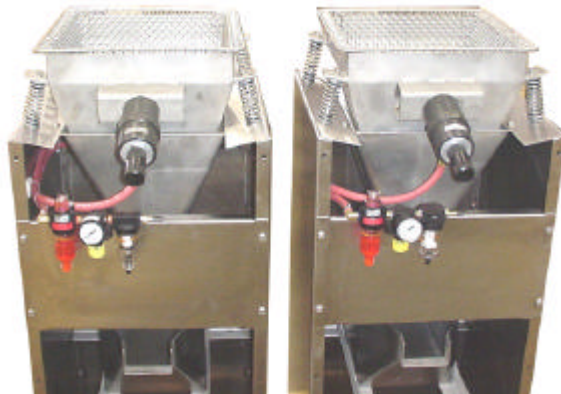

The vibrator is powered via an air piston with an operating range of 0 to 90 PSI.

The Sample Screener is complete with an air filter, oiler, regulator and a vibrator control valve. It's overall dimensions are 54"H x 17 1/4"D x 16 1/2"W.

### UEE INDUSTRIES (Unit Electrical Engineering Ltd)

1406 Maple Street, RR#1 Site 1 Comp 80, Okanagan Falls, British Columbia, Canada V0H 1R0  
phone: (250) 497-5254 fax: (250) 497-6061 e-mail: <general@uee.com> website: <www.uee.com>

in consultation with: **ANALYTICAL LABORATORY CONSULTANTS LTD.**

Jack Stanley - phone: (250) 545-0548 e-mail <jstanley@jsanalytical.com>